



Loomer
Resound Manual

End User Licence Agreement	3
Software Licence Agreement for Resound	3
Credits	5
Development Credits	5
Requirements	6
Mac OS X requirements	6
Windows requirements	6
Linux requirements	6
Resound Overview	7
What is Resound?	7
Plug-in vs Standalone	7
Resound formats	8
Supported channel configurations	9
Installation and Registration	10
Mac OS X installation	10
Windows installation	10
Linux installation	11
Product registration	11
Audio and MIDI Configuration	13
Setup Audio and MIDI	13
Program Management	15
Parameters, Programs and Bank	15
Selecting Programs within a Bank	15
File Management	16
Create a new Bank	17
Create a new Program	17
Compare a changed Program to the original Program	17
MIDI Controller Mapping	18
MIDI controllers	18
Display current MIDI controller mappings	18
Assign MIDI controllers to controls	18
Remove MIDI controller mappings from controls	19
Using Resound	20
Parameters	20
Control types	21
Status Display	22
CPU Usage monitor	22
MIDI input monitor	22
Tempo control	22

End User Licence Agreement

Software Licence Agreement for Resound

1. GRANT OF LICENCE: Subject to the terms below, Loomer hereby grants you a non-exclusive, non-transferable licence to install and to use Resound ('Software'). Under this licence, you may: (i) install and use the Software for your personal, internal use (ii) copy the Software for back-up or archival purposes; (iii) use an unregistered or evaluation version of the Software for evaluation purposes only. (iv) You may not distribute the software to others without first obtaining the required licences, where applicable. Whether you are licensing the Software as an individual or on behalf of an entity, you may not: (i) reverse engineer, decompile, or disassemble the Software or attempt to discover the source code; (ii) modify, or create derivative works based upon, the Software in whole or in part without the express written consent of Loomer; (iii) distribute copies of the Software; (iv) remove any proprietary notices or labels on the Software; (v) resell, lease, rent, transfer, sublicense, or otherwise transfer rights to the Software; By installing, copying, or using the Software, you (either on behalf of yourself as an individual or on behalf of an entity as its authorized representative) agree to all the terms of this End User Licence Agreement ('Agreement') regarding your use of the software. If you do not agree with all the terms of this Agreement, you may not use the Software.

2. RESOUND: You acknowledge that no title to the intellectual property in the Software is transferred to you. Title, ownership, rights, and intellectual property rights in and to the Software shall remain that of Loomer . The Software is protected by copyright laws and international treaty provisions.

3. DISCLAIMER OF WARRANTY: You agree that Loomer has made no express warranties, oral or written, to you regarding the product and that the products are being provided to you 'as is' without warranty of any kind. Loomer disclaims any and all other warranties, whether expressed, implied, or statutory. Loomer shall not be liable for indirect, incident, special, cover, reliance, or consequential damages resulting from the user of this product.

4. LIMITATION OF LIABILITY: You use this program solely at your own risk. In no event shall Loomer be liable to you for any damage, including but not limited to any loss, or other incidental, indirect or consequential damages of any kind arising out of the use of the software, even if Loomer has been advised of the possibility of such damages. In no event will Loomer be liable for any claim, whether in contract, tort, or any other theory of liability, exceed the cost of the software. This limitation shall apply to claims of personal injury to the extent permitted by law.

5. TERMINATION: This Agreement shall terminate automatically if you fail to comply with the limitations described in this Agreement. No notice shall be required to effectuate such termination. Upon termination, you must remove and destroy all copies of the Software.

6. MISCELLANEOUS: In the event of invalidity of any provision of this Agreement, the parties agree that such invalidity shall not affect the validity of the remaining portions of this Agreement. You agree that this is the entire agreement between you and Loomer, which supersedes any prior agreement, whether written or oral, and all other communications between Loomer and you relating to the subject matter of this Agreement.

Reservation of rights.

'VST' is a trademark of Steinberg Soft - und Hardware GmbH. All other trademarks are the property of their respective owners.

All rights not expressly granted in this Agreement are reserved by Loomer.

Credits

Development Credits

Resound © 2009 Loomer

Developed by Loomer
Interface by Kevin Barry

Tested by Clifton Cameron
 kuniklo
 Scott Simons (rexlapiin)
 taoyoyo

VST PlugIn Technology by Steinberg Media Technologies GmbH. This software is based in part on libpng, zlib, and JUCE.

Requirements

Mac OS X requirements

- Requires Mac OS X v. 10.4 or later
- Intel x86 based processor 1.0Ghz, or above, with SSE
- or
- PPC based processor 1.0Ghz, or above
- 512 MB RAM

Windows requirements

- Windows XP or Windows Vista, or above
- Intel x86 based processor 1.0Ghz, or above, with SSE
- 512 MB RAM

Linux requirements

- Intel x86 based processor 1.0Ghz, or above, with SSE
- 512 MB RAM

The following shared object libraries are required:

- libfreetype
- libasound
- libjack
- libXinerama

Resound Overview

What is Resound?

Resound is a software audio delay effect processor that emulates the sound and operation of vintage magnetic-tape echo units. Whilst not a direct copy of any one particular model, it takes features from several of the classic delay devices, and unites them into a convincing and pleasingly retro sounding effect.

Resound not only subtly models the characteristic mechanical noise present in hardware magnetic-tape units, but also allows the noise to be controlled; from gentle warmth and distortion, to noisy, gritty, and unstable. The sound can be shaped further using the moveable highpass filter. And with feedback set beyond a certain intensity, Resound is even capable of self-oscillation.

Resound's echoes can either be synced to the host tempo (expressing delay times as musical subdivisions of a beat, each echo will be exactly in time with the host) or in free-time mode (allowing any delay time, up to 2 seconds.) The reverse mode adds further flexibility: by playing each delay backwards, Resound can produce unique effects beyond what hardware magnetic-tape units are capable of.

True independent stereo processing means that left and right channel separation is preserved. Resound is also capable of running in mono, or even mono to stereo.

With optimized audio algorithms that won't overload your processor, rock-solid stability, and easy integration with any MIDI hardware controller, Resound is ideal for live work. With a simple and intuitive interface, flexible Bank and Program management, and total parameter automation, Resound fits right into your studio environment.

Plug-in vs Standalone

Depending upon your individual studio setup, Resound can either be used as a plug-in component of a host application, or as a standalone application requiring no other dependencies. Generally, by using the host application's routing flexibility, running as a plug-in allows easier integration with existing plug-in effects and instruments. If this integration is not required, the standalone version, without the extra layer of complexity added by the host consuming resources, performs slightly better.

Bank and Program information, as well as MIDI Mapping assignments, are identical in both standalone and plug-in versions. This means any sounds created in one format can be opened in the other.

Resound formats

For the Mac, the following formats are provided:

- Standalone Application
- Audio Unit (AU) Plug-In
- VST Plug-in
- RTAS Plug-in

These formats are available for Windows PC:

- Standalone Application
- VST Plug-in
- RTAS Plug-in

Linux have the following formats:

- Standalone Application
- VST Plug-in

Supported channel configurations

For maximum flexibility, Resound can be used in several possible input and output channel configurations. Resound is a true stereo effect: left and right channel separation is preserved. The following configurations are possible:

- mono to mono (1 input, 1 output)
- mono to stereo (1 input, 2 outputs)
- stereo to stereo (2 inputs, 2 outputs)

Note that some host applications may not support one or more of these configurations; consult your host's documentation for further details.

Installation and Registration

Mac OS X installation

1. Start the installation process by double-clicking the Resound installer application.
2. Read the introduction screen dialog text. Press **Continue** when you are ready to proceed.
3. Read the Licence Agreement. Click **Continue**, then **Agree** to confirm you have read and agree to the licence terms.
4. Select a destination volume into which to install Resound, and then click **Continue**.
5. From the list of installable components, uncheck any formats that you do not wish to install. Click **Continue** to proceed.
6. To complete the installation, press **Install**.

The components are, by default, installed into the following directories:

- VST plug-in into */Library/Audio/Plug-Ins/VST*
- Audio Unit plug-in into */Library/Audio/Plug-Ins/Components*
- RTAS plug-in into */Library/Application Support/Digidesign/Plug-Ins*
- Standalone application into */Applications*
- Documentation into */Library/Documentation*
- Default Bank into */Library/Application Support*

Windows installation

1. Start the installation process by double-clicking the Resound installer application, Setup.exe.
2. Read the welcome screen dialog text. Press **Next** when you are ready to continue.
3. Read the Licence Agreement. Click **I Agree** to confirm that you have read and agree to it.
4. From the list of installable components, uncheck any formats that you do not wish to install. Click **Next** to continue.
5. If you have chosen to include the VST plug-in format, select the directory into which it will install. Click **Next** to continue.
6. Select a directory into which the common files will install. The user documentation, default Bank, and the Standalone application (if selected in the the list of components), will be placed in this location. To complete the installation, press **Install**.

Unless any other directories are selected during the installation, the components are installed into the following directories:

- VST plug-in into the VST plug-ins folder, which is, unless configured otherwise, *C:\Program Files\Steinberg\VSTPlugins*
- RTAS plug-in into *C:\Program Files\Common Files\Digidesign\DAE\Plug-Ins*
- Standalone application, documentation and default Bank into *C:\Program Files\Loomer\Resound*

Linux installation

Resound for Linux is distributed as a standard Linux tarball. To install, extract the package using any unarchiving utility; the following command-line invocation will suffice:

```
tar xzvf Resound.tar.gz
```

If you have a Linux VST host and have configured your VST Path, the VST plug-in can be moved into the required directory with the following commands:

```
cd Resound
mv ResoundVST.so $VST_PATH
```

Without the VST Path configured, you will need to ensure that your host uses the Resound directory when searching for VSTs; consult your host's documentation for information on how to do this.

Resound requires the following shared object libraries to be installed:

- libfreetype
- libasound
- libjack
- libXinerama

Without these libraries installed, the application will not launch. Install the libraries using your distribution's particular package management system, such as apt-get; consult your Linux distribution documentation for more information.

Product registration

Having installed Resound, it will run in evaluation mode with the following limitations:

- User created Program and Bank configurations can be saved, but not loaded.
- Output will be periodically interrupted, approximately every 20 seconds, by a short moment of silence.

These limitations can be removed by purchasing a licence and registering your licence information into the product. Note that registering Resound on a particular machine will remove the evaluation limitations for all Resound plug-in formats installed on this machine; you don't need to individually register all plug-in formats. Licence information will be in the form of a user name and licence key.

To purchase a Resound licence:

1. Launch Resound. This can be either the standalone application, or as a plug-in.
2. From the **Options** menu, choose **Purchase Resound Licence**. This will launch the shop website, from where a Resound Licence can be purchased by clicking **Add To Cart**, followed by **Checkout**. Follow the on-screen prompts to enter your payment details and confirm your purchase.
3. Once you have purchased Resound, you will receive your licence key information via email. It is important to keep this information safe because you will require the licence key if you ever need to reinstall and re-register Resound.


To register your copy of Resound:

1. Choose **Enter Resound Licence** from the **Options** menu.
2. Enter your name in the **Name** field. This must match exactly the name that was used to purchase your Resound licence, including capitalization of letters.
3. Enter your licence key in the **Licence Key** field. This must match exactly the licence that you received when you purchased Resound, including any hyphens.
4. Press **OK** to confirm that your name and corresponding licence key have been entered. You will be informed that the application must be restarted in order for registration changes to take effect. If you are currently running the standalone application, close and relaunch it. If Resound is currently running as a plug-in, remove it from the host and add a new instance of it.
5. Resound should now be registered. If the label on the bottom of the interface still reads Unregistered Evaluation, you must have entered the licence information incorrectly. Go back to step 1, paying careful attention that the name and licence key entered match exactly the licence information in the registration email.

Audio and MIDI Configuration

Setup Audio and MIDI

When running Resound as a Standalone application, you will need to setup your audio and MIDI interfaces. Note that when running as a plug-in, audio and MIDI routing is provided by the hosting application; consult the host's documentation for details. To open the Audio & MIDI Configuration dialog, select **Audio & MIDI Configuration** under the **Options** menu.

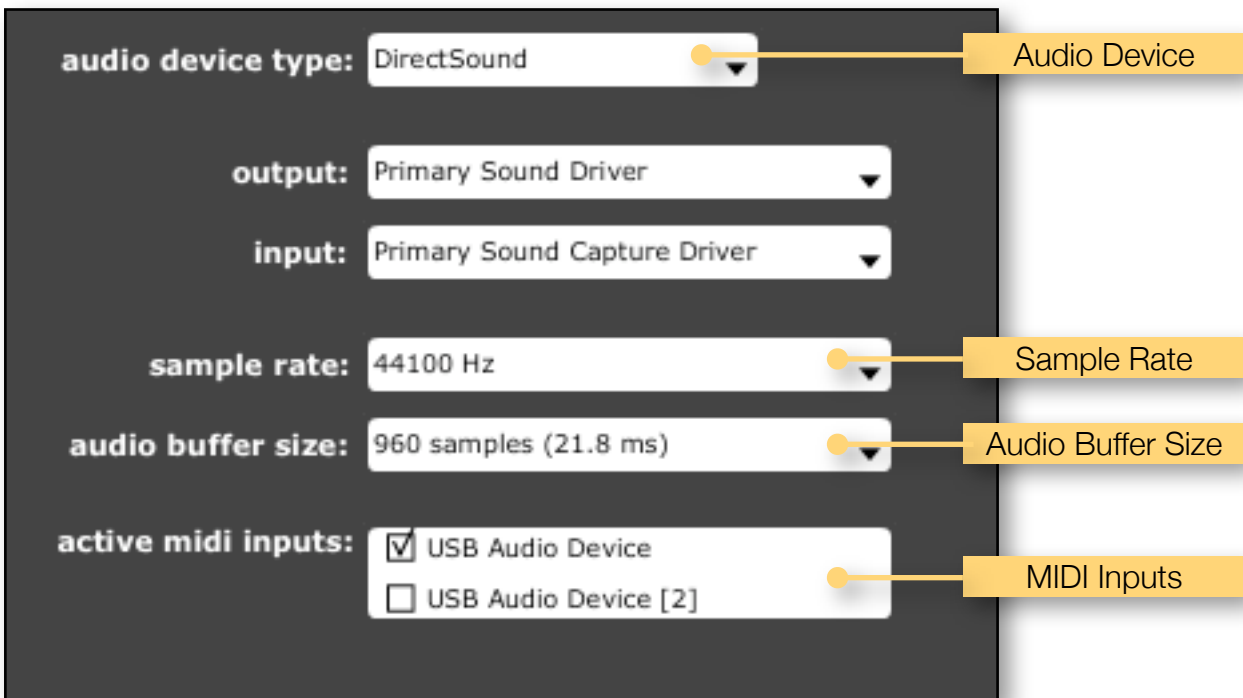

The following dialog will be displayed:

From this dialog, the following details of your Audio and MIDI setup can be configured:

- **Audio Device.** Select the Audio Device you want to use from the list of available devices. Certain devices tend to perform better than others, so if multiple devices are available, you should favour: on Mac, using Core Audio; on Windows, using ASIO; on Linux, using JACK.
- **Sample Rate.** The Sample Rate dictates the overall quality of the audio output. Using a lower Sample Rate will reduce the presence of high-frequency components. Higher Sample Rates should therefore be preferred. However, be aware that the CPU Usage is directly proportional to the Sample Rate. A good compromise between quality and CPU Usage is 44100Hz, which is the Sample Rate of CD audio. Select the Sample Rate you require from the available list.

- **Audio Buffer Size.** The Audio Buffer Size governs latency; a smaller buffer means that Resound will respond more quickly to MIDI messages and Parameter changes. However, a smaller Audio Buffer Size will require more CPU Usage. Select the required Audio Buffer Size from the available list. Using too small of an Audio Buffer can overload your computer to the extent that audible clicks are heard. In this case, increase the Audio Buffer Size until clicks are no longer present..
- **MIDI Inputs.** Check any MIDI Input devices that you want to use with Resound.

Program Management

Parameters, Programs and Bank

You can modify the audio output that Resound produces by setting the value of *Parameters*. Each Parameter, such as Delay Time, Feedback, or Highpass, will affect a specific element of the sound. The state of all Parameters are collectively called a *Program*. Programs are given a suitable name, displayed in the Menu Bar, to describe the sound they produce.




Programs are grouped together into a *Bank*. You can only load a single Bank at a time. Although there is no requirement or limitation on how Programs are grouped, it is often useful to collect related Programs together, for example: a Bank of percussion sounds, a Bank containing sounds required to perform a specific set-list.

Selecting Programs within a Bank

There are several ways of selecting a Program within a Bank:

- **Menu Bar Previous and Next Controls.** If you wish to browse quickly through all the Programs within a Bank, you can do so using the the Previous and Next controls.
- **Program Select Control.** The Program Select Control will display a list of all programs contained within a Bank. The required program can be selected from this list.
- **Program Change MIDI Messages.** You can change programs by using MIDI Program Change commands. This requires a MIDI keyboard or a control surface with the ability to send MIDI Program Change commands; consult your controller's documentation for details. If using Resound as a plug-in, this functionality is dependent upon the host correctly forwarding MIDI messages to the plug-in; check the documentation provided with your host for details.
- **Host Application Program Management.** If Resound is being used as a plug-in, the host may provide a mechanism to change the currently selected Program. The operation of this is entirely host dependent, and varies greatly from host to host; check the documentation provided with your host for details

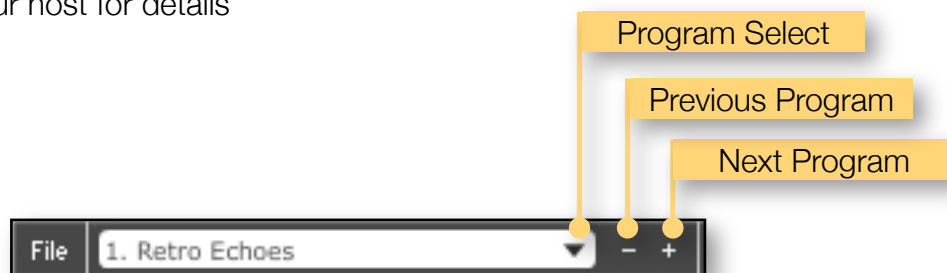

File Management

If you wish to keep any changes to a Program, it will need to be stored in the current Bank. A program that needs storing is marked by an asterisk (*) suffix beside its name. Any changes will be lost if you change the currently selected Program without first storing it. The steps required to store a Program depend upon where you want to save it:

- To store the Program changes over the current version of itself in the bank:
 1. Click **Store**. Notice that the asterisk disappears, indicating that the Program no longer has any outstanding changes that require storing.
- To store the Program changes to a different position in the Bank:
 1. Click **Store To**. All the Programs within the Bank will be displayed in a list.
 2. Click on the required Program to overwrite it. Notice that the asterisk disappears, indicating that the Program no longer has changes that require storing, and that the newly stored Program is now selected.

To permanently keep Banks and Programs you have created, you will need to save them as files. Banks can be saved in their entirety, or you can save individual Programs from within a Bank. When Resound is closed, any unsaved changes to a Bank will be lost.

To save an entire Bank to a file:

1. Under the **File** menu, choose **Save Bank...**
2. Choose a location and enter a filename for the Bank.

To save a Program to a file:

1. Select the Program you want to save
2. Under the **File** menu, choose **Save Program...**
3. Choose a location and enter a filename for the Program.

To load a saved Bank from a file:

1. Under the **File** menu, choose **Open...**
2. Browse to the location and select the required Bank file.

To load a saved Program from a file:

1. Decide where in the Bank you want the Program to be loaded.
2. Select this Program.
3. Under the **File** menu, choose **Open...**
4. Browse to the location and select the required Program file

Create a new Bank

Select **New Bank**, under the **File** menu, to create a new Bank. All Programs within the Bank will be in their initialized state.

Create a new Program

Select **New Program**, under the **File** menu, to create a new Program. This Program will be in its initialized state.

Compare a changed Program to the original Program

Often you'll want to compare a Program that you have amended to see if it is actually an improvement on the original. Pressing the **A | B** button temporarily reverts a changed Program back to its original state. Pressing the **A | B** button a second time returns to the changed Program. This method allows you to easily contrast the Program changes you have made to the original Program.

MIDI Controller Mapping

MIDI controllers


Instead of configuring a Program using a mouse, you can change any Parameter values using a MIDI keyboard or a control surface. This is done by mapping each Parameter to a *MIDI Continuous Controller (CC)*. A Parameter can only be mapped to a single MIDI controller; the same MIDI control can, however, be mapped to several different Parameters.

MIDI Controller mappings are global; once defined, the same mapping assignments will be used by all Resound Programs. This means that you only need define mappings once for your particular controller.

Display current MIDI controller mappings

To view the current MIDI controller mappings:

1. Enter MIDI Learn Mode by choosing **Start MIDI Learn** under the **Options** menu. Each Parameter's mapped MIDI controller will now be displayed beside it in yellow text. Parameters without any mapping will be labelled -.
2. When you have finished viewing the MIDI controller mappings, choose **Stop MIDI Learn** under the **Options** menu.

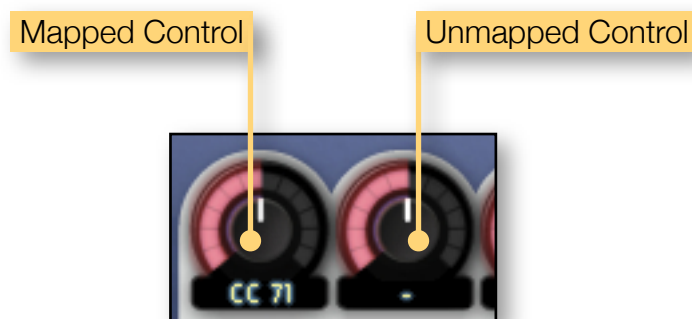

Assign MIDI controllers to controls

To map a MIDI controller to a Parameter:

1. Enter MIDI Learn Mode by choosing **Start MIDI Learn** under the **Options** menu.
2. Click on the Parameter you wish to map to a MIDI controller.
3. Turn your MIDI controller. The Parameter should now be labelled with the MIDI CC number of this controller.
4. You can now either:
 - Map another Parameter by repeating these steps from Step 2.
 - Finish mapping Parameters by choosing **Stop MIDI Learn** under the **Options** menu.

Remove MIDI controller mappings from controls

To remove a mapped MIDI controller from a Parameter:

1. **Enter MIDI Learn Mode** by choosing Start MIDI Learn under the **Options** menu.
2. Click on the Parameter from which you wish to remove the mapping. This Parameter will become unmapped, and the CC number label on the Parameter will disappear to reflect this.
3. You can now either:
 - Remove the mapping from another Parameter by repeating these steps from Step 2.
 - Finish removing Parameter mappings by choosing **Stop MIDI Learn** under the **Options** menu.

Using Resound

Resound can be used as either an insert or send effect. When used as an insert effect, Resound is placed directly in a host's audio channel. As a send effect, Resound is placed in a host's auxiliary or bus channel, and a portion of the original signal is fed into the effect. Consult your host's documentation to find out how to add a plug-in as either an insert or as a send effect.


Parameters

- The **Noise** Parameter introduces instability and hiss into the delay. These additions imitate the imperfections present in tape-based delay units and so produce a more convincing retro sound.
- The **Time** Parameter controls the length of time between repeats. When Sync is turned on, the delay time is based upon musical note divisions and will be in step with the host tempo. With Sync off, the time delay is expressed in milliseconds. A characteristic effect, often used in tape-based delay units, is the pitch shifted delay; this is achieved by sweeping the Time Parameter value upwards or downwards.
- The **Feedback** Parameter controls the proportion of the signal to be fed back into the delay line. As the value increases, the delayed signals volume will increase. At higher values, it is possible to create a wall of sound using delays that don't decrease in volume when they are fed back into the delay line. Beyond this, it is even possible to create delays that increase in volume. Warning: High Feedback settings can produce dangerously loud signals that can damage both your ears and audio equipment.
- Using the **Highpass** Parameter, the amount of low frequency content fed back into the delay line can be changed. More low frequency content is removed as the Highpass value increases.
- The **Sync** Parameter switches the Time Parameter between two modes of operation: when Sync is off, the delay time is independent of the host tempo; when Sync is on, the Time Parameter is controlled by the host tempo. See Time Parameter.
- Enabling **Reverse** will cause the delayed signal to be played backwards.
- The **Mix** controls the relative volumes of the original (dry) and delayed (wet) signal. At 0%, only the dry signal is present; at 100% only the wet signal will be heard. At 50%, the dry and wet signals will be heard in equal amounts. A 100% wet signal is useful when Resound is being used as send/return effect and you don't want any of the original signal to be heard.

- The Volume Parameter governs the overall loudness of the effect. A meter provides a visual cue to the current level: the louder the output, the higher the meter will register. Too loud of an output will produce digital clipping, a usually undesirable form of distortion. When this occurs, the meter will display a red warning indicator. Click the meter to reset the warning display.


Control types

- Click on a **rotary control** and drag either upwards to increase the value, or downwards to decrease it. Hold down *shift* and drag to make smaller and more precise changes. Hold down *ctrl* and click to return the control to its default value. Rotary controls can also be changed by hovering the mouse cursor over a rotary control and scrolling the mouse-wheel up or down.
- Click on a **button control** to toggle its value between On and Off. Hold down *ctrl* and click to return the control to its default value.

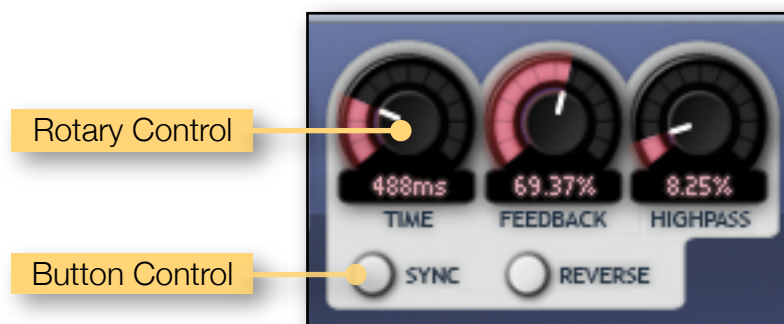

Status Display

Status Display information is displayed at the bottom right area of the Resound interface:

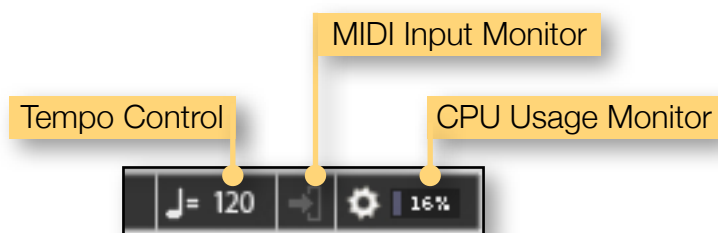

CPU Usage monitor

The CPU Usage monitor displays the percentage of processor resources dedicated to producing the audio output. The total processor resources on a computer are limited, so when Resound increases its CPU usage, there will be less CPU resources remaining for other plug-ins and applications. CPU Usage will differ depending on which Program is currently loaded, how that particular Program is configured, and how many voices are being played.

A value of 100% indicates that your computer is running at maximum capacity and will not have enough processing power remaining for anything else. You might notice audio output become temporarily glitchy, or that the user interface becomes sluggish. There are several methods for resolving this:

- Choose a different Program that has less CPU Usage.
- If running in Standalone mode, you can increase the latency or decrease the sample rate. See section *Setup Audio & MIDI*.
- If your host offers Freeze or Offline processing, you might be able to render the audio output in non-realtime.

MIDI input monitor

The MIDI monitor flickers to show that a MIDI Message has been received. You can use this to confirm that your MIDI controller is configured correctly for Resound.

Tempo control

The Tempo control only appears when running Resound in Standalone mode; when running as a plug-in, the host application will provide the tempo for Resound. The Tempo control displays the current Tempo, in beats per minute (bpm). It can be changed by either:

- Double-clicking the tempo control, typing the required bpm and pressing return.
- Clicking on the tempo control and dragging either upwards to increase the tempo, or downwards to decrease the tempo.